



Fax: 717-625-7095

## **8300 SERIES**

## **Heavy-Duty Commercial Grade 1 Rim Exit Devices**



## Standard Features

Performance Complies with ANSI A156.3, 1994, Grade 1, UL listed

Rail Fits 28" to 36" doorsLatch Stainless steel 5/8" throw

■ Backset 2-3/4"

Strike Adjustable with slotted holes for adjustments

Fastners Accommodates wood or metal doors

Door Range 1-3/4" to 2" thickness
Door Preparation Surface mounted
Warranty 10 year limited

**Optional Features** 

RailFits 48" door (special order)

Exterior Trim Exterior blank pull, exterior pull with cylinder cut out, entry ball knob trim,

storeroom ball knob trim, entry lever trim without clutch, exterior thumb piece

trim, exterior escutcheon lever trim, pull trim with rim cylinder

Cylinder\* Schlage (SCC), Schlage C (SC5) 5-pin, Schlage E (SCE), Arrow A (ARA),

Corbin 60 (C06), Corbin 59A1 (C059A1), Corbin Russwin L4 (CL4), Russwin D1 (RD1), Sargent LA (SAL), Schlage F (SCF), Weiser E (WRE), Yale 8 (YA8),

Yale GA (YGA)

Keying Grand master key (GMK), construction master key (CMK), master key (MK),

keyed different (KD), keyed alike (KA), interchangeable core uncombinated (IC),

0-bitted (0BIT)

UL Listed 3 hour fire rated device available

Fire Rated UL labeled fire rated device available for use on doors rated up to 3 hours. Fire

rated device also available for larger doors up to a maximum of 4' x 8'. Specify

when ordering.


Strikes Other strikes available

\* All cylinders 6-pin except Schlage C (SC5) - 5-pin.





## 8300 Series Trim

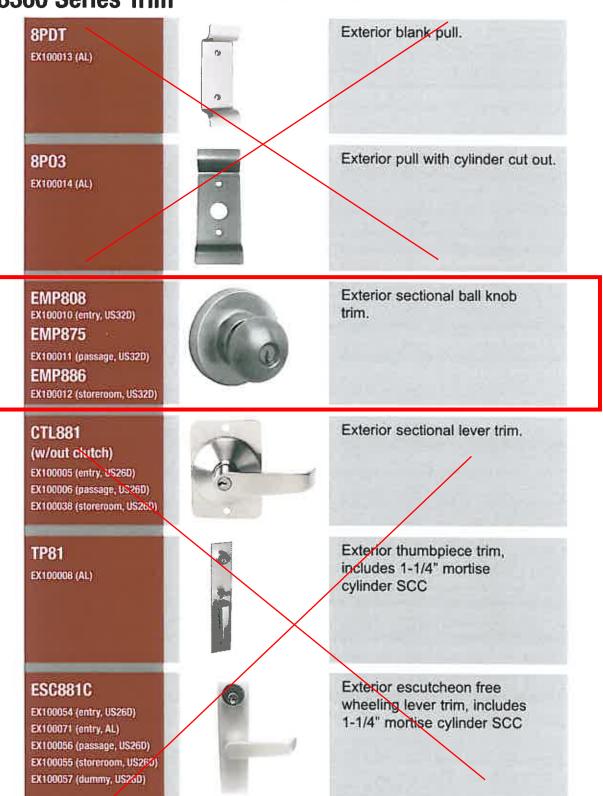

NOTE: AL=Aluminum, US32D=Satin Stainless Steel, US26D=Satin Chrome

TELL MANUFACTURING, INC. — Page 2 — 2009

CORPORATE OFFICE: 207 BUCKY DRIVE, LITTIZ, PA 17543 TOLL FREE: 800-433-4047 PHONE: 717-625-2990 FAX: 717-625-7095

OTHER LOCATIONS: HOUSTON, TEXAS ELKHART, INDIANA MIRA LOMA, CALIFORNIA

WEBSITE: www.tellmfg.com